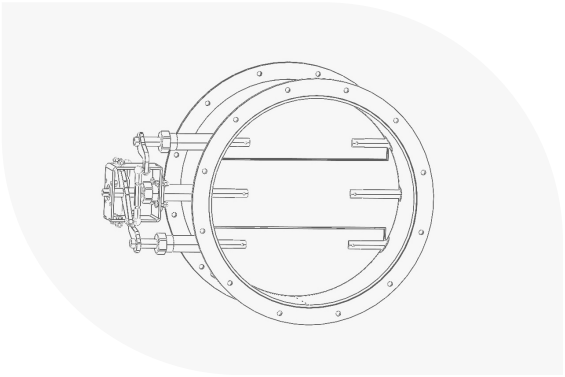


# GDFN-C | Gas damper valve flanged normal temperature control

| | |
|---|---|
| **Application** | For control (modulating) service |
| **Range** | DN 250 – 2000 |
| **Connection** | Flanged, butt-weld, Flange drilling in accordance with: EN1092-1, DIN24154 or custom build |
| **Inspection & testing** | FCI 70-2 Class I & II available (0.5% KV90) EN12266 |
| **Temperature range** | -40°C / + 400°C |
| **Material** | Carbon Steel, AISI304, AISI316, AISI253MA, AISI321, ... |
| **Design rules** | EN12516-1, EN12516-2, EN1090 |
| **Face 2 face** | Manufacturer standard or according to customer specification |
| **Operated** | Handlever, gearbox, pneumatic actuator, electrical actuator |

**Athree bv**
Engineered in Belgium
info@athree.be
Follow us

**Production plant**
Hoeikensstraat 5 unit 16
2830 Willebroek
Belgium

**Need more information?**
Visit our website: www.athree.be