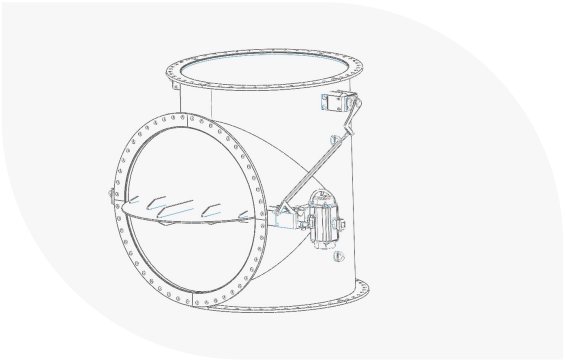

# GDFM-D | Gas damper valve flanged medium temperature diverter

| | |
|---|---|
| **Application** | For On/Off service |
| **Range** | DN 250 – 3000 or rectangular/square section |
| **Connection** | Flanged, Butt-weld, Flange drilling in accordance with: EN1092-1, DIN86044, DIN28031, JIS7805, ASME B 16.5 Cl. 150 or 300, ASME 16.47 Serie A, B or custom build |
| **Inspection & testing** | FCI 70-2 Class I , II & III available (0.1% - KV90) EN12266 |
| **Temperature range** | -40°C / + 750°C |
| **Material** | Carbon Steel, AISI304, AISI316, AISI253MA, AISI321, AISI309, Alloy 800HT/625, ..... |
| **Design rules** | EN12516-1, EN12516-2, ANSI 16.34, EN1090 |
| **Face 2 face** | Manufacturer standard or according to customer specification |
| **Operated** | Handlever, gearbox, pneumatic actuator, electrical actuator |

**Athree bv**
Engineered in Belgium
info@athree.be
Follow us

**Production plant**
Hoeikensstraat 5 unit 16
2830 Willebroek
Belgium

**Need more information?**
Visit our website: www.athree.be