


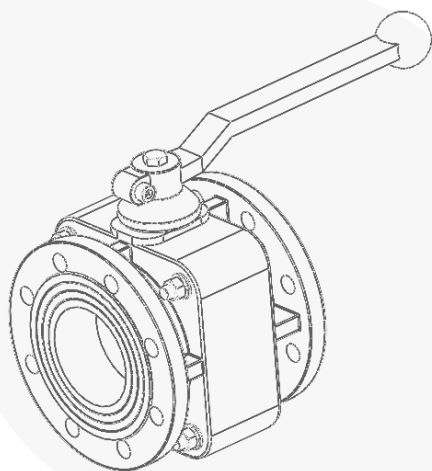

SBAV | Solids ball valve

Application	For all kinds of solids
Nominal width	DN 50(2") - 65 (2 1/2") - 80 (3") - 100 (4")
Connection one side	*One side flange according DIN2501 or DIN28460 with 2nd side female or male pipe thread per DIN 259
Connection dual side flanged	*Dual side flanged as par DIN28480 or DIN 2501 with installation length according EN558-1
Connection dual side threaded	*Dual side threaded with male/female pipe thread side one according DIN 259 and male/female side thread as par DIN259 side two
Permanent sealing option	Self adjusting spring disc system and O-ring spring mounted design for permanent sealing for medium temperatures
Self cleaning option	Borided ball to increased resistance and special ball seating geometry removes stucked material during switching
Operated	Handlever, pneumatic actuator, electrical actuator. Temperatures to be specified between -10°C and 120 °C. Pressures to be specified until 16 Bar nominal pressure
Special designs	Available on request