




SPIV | Solids pinch valve

Application	Specially designed for use in silo trucks
Range	DN 50(2") - 65 (2 1/2") - 80 (3") - 100 (4")
Connection	Dual side flanged par DIN2501 or DIN28460
Design	Body made with light alloy and oversized wall thickness. Flanges out of gray cast iron.
Working conditions	Pneumatic air supply: 5-6 bar air pressure Temperatures to be specified between -10°C and 120 °C, valve tested until 24 bar
Special designs	Available on request

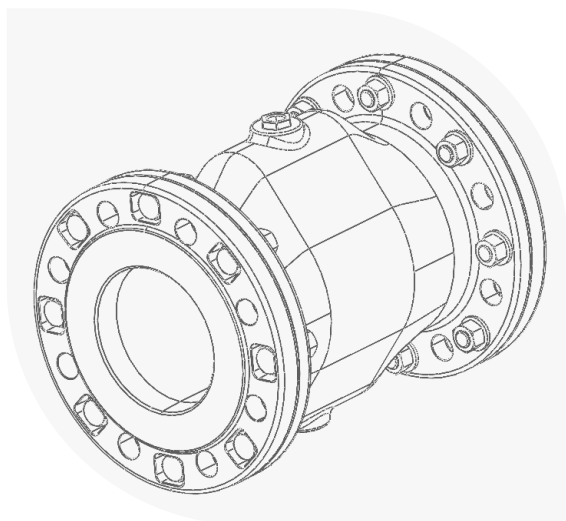

Athree bv
Engineered in Belgium
info@athree.be
Follow us

Production plant
Hoeikensstraat 5 unit 16
2830 Willebroek
Belgium

Need more information?
Visit our website: www.athree.be